

5 in 1 FREEZE & DISMANTLE

复冻



FREEZE • PENETRATE • RUST LOOSE • LUBRICATE • RUST REMOVE



No Impossible Dismantled Screws!



FUKKOL

It waste a lot of time, resource, manpower, resource, money on the rust corrosion problems every year, and the product damage due to the rust corrosion is impacting on all walks of life everyday.




Plane Maintenance - France




Ship Manufacturing - Malaysia



铁路 - 中国北京

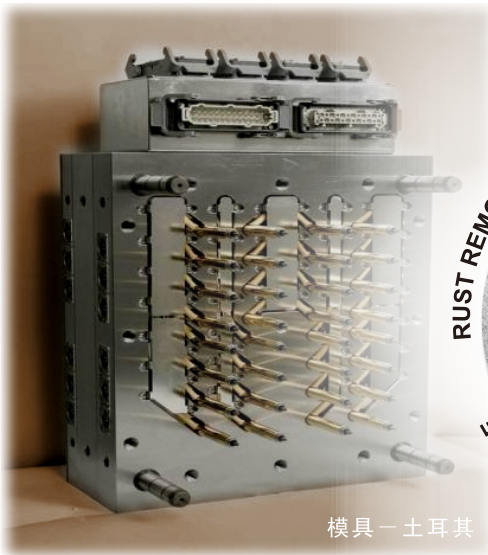

模具 - 土耳其

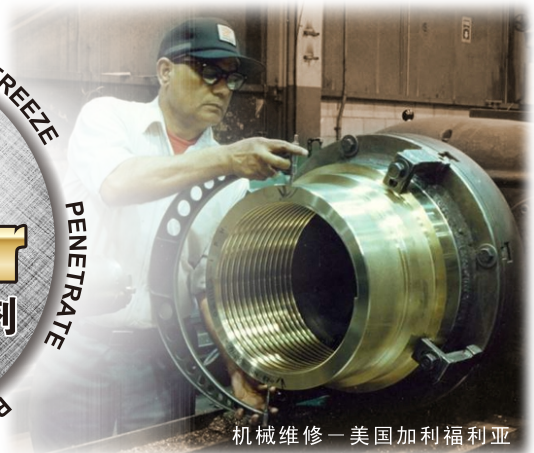

机械维修 - 美国加利福尼亚



建筑 - 香港



矿山 - 智利

DESCRIPTION

FUKKOL Freeze & Dismantle Five In One is a product with 5 characteristics together in one .The supper quality turn s out to be the most effective in the similar products. It features with Freeze, Penetrate, Lubricate, Remove rust and Anti-rust.

It is a multipurpose dismantle screws aerosol professional in handle the rust corrosion problems in screws, nuts, rivets, metal fastenings. It can be applied in many areas such as Mould , agriculture, chemical industry, communication, auto industry, aerospace, metallurgy and military industry.




OPERATING PRINCIPLE

FUKKOL Freeze & Dismantle Five In One is base on the shock-freeze principle to dismantle the rust corroded and seized metal accessories such as screws, nuts, rivets, metal fastenings ect.

It is the special lubricants with low viscosity and anti-pressure characteristics which base on multi-


functional formula. The Freeze&Dismantle features with Freeze, Penetrate, Lubricate, Remove rust and Anti-rust.It use the physical phenomenon "Expand when heated and contract when cooled" to shock freeze the the screws and penetrate into cracks. Then the lubricants can fully penetrate into the rust corrosion cracks, it can dismantle the screws in short time with no difficulties.

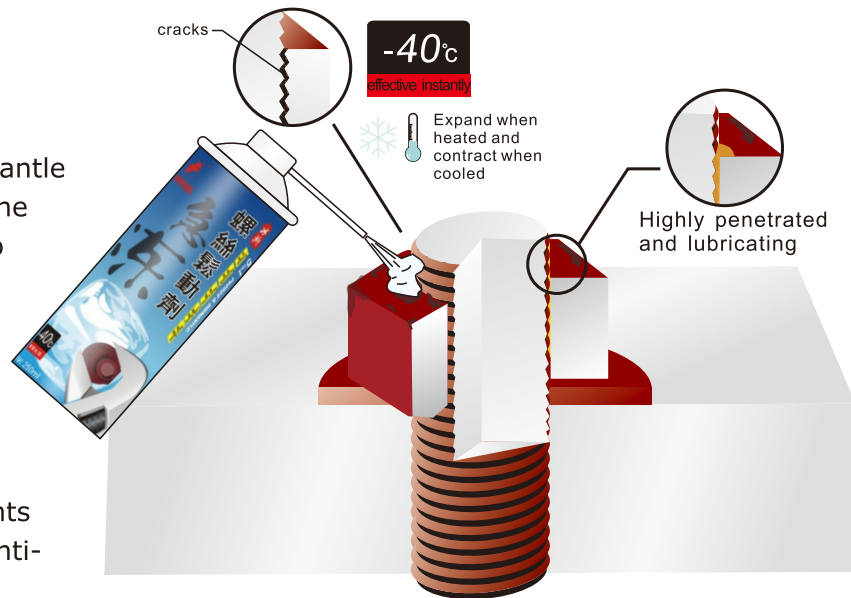

ADVANTAGES

- ❄️ Shock freezing (It can reach -20°C when you continuously spray the aerosol with 7 seconds)
- ❄️ Ensure the nuts and bolts will not be transformed, warped, slipped angle with excessive strength.
- ❄️ Save time and money in dismantling the screws.
- ❄️ multifunctional special lubricants five in one with the characteristic of Freeze, Penetrate, Lubricate, Remove rust and Anti-rust.


HOW TO APPLY

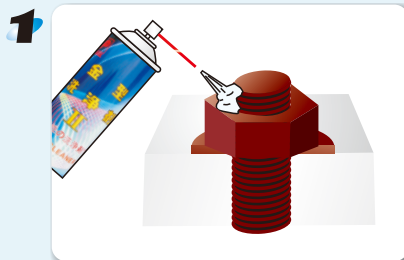


1 Remove dirt and loose rust, you must ensure there is no oil contamination or carbon on the surface of the bolts and screws, we would like to recommend the FUKKOL 15548 Mould Cleaner.



2 Shape can well and continuously spray on the joint place between the screws and nuts for about 5-7 seconds from a distance of 3cm-15cm.

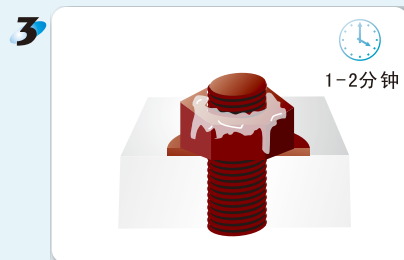

3 Parts can be dismantled after allowing 1-2 minutes for penetration.

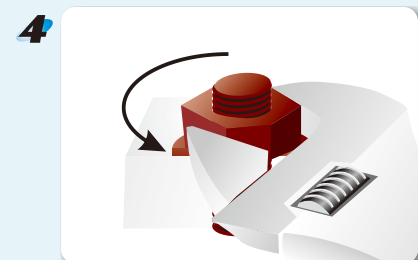

4 Try to use the spanner to dismantle the screws. If the condition is not change please apply more and widen the applied area.

⚠️ VOID SPRAYING ON EYES , SKIN OR ANY PARTS OF THE BODY.

ENVIRONMENTAL CONSERVATION

FUKKOL Freeze & Dismantle Five In One's aerosol will not casue any destruction to the ozone layer, the lubricants is formed by biodegradable chemical composition. Got the authority certificate from ROHS and MSDS.



**AUTOMOBILE
CHAPTER**



FREEZE & DISMANTLE 5 IN 1

Apply to dismantle screws in engine, brake system, tyre and speed changing box.



ANTI-SEIZE COPPER COMPOUND

Apply to engine and brake system parts to avoid the seizing on screws and nuts caused by high temperature.




BLUE PRESSER GREASE II

All these greases on this series are recommended for the lubrication on chassis, wheel bearings, clutch bearings, wheel joints of steering and suspension systems, and universal joint etc. of all types of passenger cars, trucks, vans, buses, tractor, construction, earth moving and mobile equipment.



REPAIR CLAY

It can perfectly adhere on the screw thread on metal, wood, rock, plastic and ceramic to avoid the trouble of enlarge aperture re-tapping due to the screw slip. The REPAIR CLAY will be totally consolidated after 3 hours and reached 40sus Rockwell Hardness. You can use the original crews after re-tapping on the consolidated area.



REPAIR CLAY

Apply to the different moving parts on automobile, such as cross head, gear, bearing and door hinge etc. Solved the inconvenient application of grease in efficient spray form.



MOULD CLEANER II

Suitable for the part pretreatment cleaning. Use environmentally friendly and harmless to plastic formula to clean the oils, carbonization etc.




**SHIPPING
CHAPTER**



RUSTKING L TYPE RUST-PROOF AGENT

It is proved that anti-rust hard wax film will not be washed by seawater after 100 hours test on the salt mist (anti-rust performance test). FUKKOL RUSTKING L TYPE RUST-PROOF AGENT can apply to anti-rust on all kinds of metal parts and machines on the shipping.



DAC 2 RUST REMOVER

DAC 2 RUST REMOVER is a soluble environmental friendly rust remover, its disassemble ion and odor free formula remove rust in a short time and make the working condition safe. Apply to remove the rust corrosion on parts or machine due to the sea water corrosion and long time soaking in the water.



POLY CLEAN OIL

FUKKOL POLY CLEAN OIL is a multipurpose oil remover with high-effect cleaning power, odor moderate and excellent evaporation properties. Suitable to remove the oil on metal parts, machine and tools.



5 IN 1 RELEASE & DISMANTLE

FUKKOL 5 IN 1 RELEASE & DISMANTLE is a multipurpose dismantle screws aerosol professional in handle the rust corrosion problems in screws, nuts, rivets, metal fastenings. Suitable to loose the screws in decks, body of ship, engine, gear-box or parts working under water with rust corrosion.



REPAIR CLAY

FUKKOL REPAIR CLAY can repair all kinds of parts on metals, plastic and glass etc for emergence. Its extra-heavy hardness can overcome severe shock and even can support long working time under water after 3 hours' total consolidation.



STEELMAKING
CHAPTER




5 IN 1 RELEASE & DISMANTLE



FUKKOL 5 IN 1 RELEASE & DISMANTLE is a multipurpose dismantle screws aerosol professional in handle the rust corrosion problems in screws, nuts, rivets, metal fastenings.

Apply to release all kinds of seized steelmaking equipments cause by long term high temperature working condition.



1400°C HIGH TEMPERATURE GREASE (FUKKOL H.T. PASTE)



The special designed NANOMETER ceramic powder can bear long term working temperature at 1400°C .The NANOMETER grade ceramic powder form a dry lubricant film after the evaporation of lubricant. And also it warranty no carbonization under high temperature. Suitable to apply to lubricate the screws, bearings, chain or conveyor belt etc.



FULLY SYNTHETIC WATER-BASED GRAPHITE HOT-ROLLING OIL



Suitable for all kinds of hot-rolling moulding such as carbon steel, aluminium alloy etc.

Fully synthetic water-based graphite hot-rolling oil can dilute with water by 3-6 times. The minuteness graphite will not have an effect on the glossiness of the product and have a good isolation when part demoulding.



MOLYFU SPRAY



FUKKOL MOLYFU SPRAY is a special dry lubricants with high proportion on MO2 (45%) which can bear the condition of 2 pound force/cm². It is a lubricants which can resist high temperature, extreme pressure, and have low contamination . Suitable to use on bearings, slider, slide way , and metal parts on steelmaking equipments.

5 in 1 Freeze & Dismantle

FREEZE • PENETRATE • RUST LOOSE • LUBRICANT • RUST REMOVED

存在的根源 质量
Quality of Life



FUKKOL

Copyright ©2010, KALEN INTERNATIONAL LTD. PRINTED IN CHINA, CO2010

www.fukkol-lube.com